



DATA SHEET

3.5mm Male 3 Position TRS to Female XLR Cable

Connect a tablet, laptop, voice recorder, or any 3.5mm audio output to a mixing console, amplifier, or powered speaker

OVERVIEW

The 3.5mm Male 3 Position TRS to Female XLR Cable is perfect for interconnecting devices with 3.5mm jacks and devices with XLR inputs — making it ideal for mixing consoles, amplifiers, and powered speakers.

This audio cable includes a 3.5mm TRS (Tip/Ring/Sleeve) connector, which means this cable has three conductors or three poles, including left and right stereo channels. The 3.5mm TRS jacks are commonly found on most stereo audio devices, while XLR inputs are commonly found on mixing consoles, amplifiers, and powered speakers. This is an unbalanced cable, so the left and right channels are soldered together making a mono signal to XLR, allowing the left and right stereo signal from a source with a 3.5mm stereo output to be converted to a single mono feed.

This audio cable has 22 AWG conductors, insulated, under an aluminum foil shield, and covered by a soft PVC shell. The soft PVC jacket reduces the risk of the cable kinking and damaging the conductors. Enjoy lasting quality and excellent performance no matter the connection.

FEATURES



- Three poles/conductors for TRS jacks found on microphones and stereo audio devices
- Unbalanced cable, the Left and Right channels are soldered together
- XLR input for mixing consoles, amplifiers, and powered speakersLifetime warranty, for peace of mind

ITEM DESCRIPTION


C2G41468	18in (0.5m) 3.5mm Male 3 Position TRS to Female XLR Cable
C2G41469	3ft (0.9m) 3.5mm Male 3 Position TRS to Female XLR Cable
C2G41470	6ft (1.8m) 3.5mm Male 3 Position TRS to Female XLR Cable

PHYSICAL CHARACTERISTICS

- Conductor: 22AWG (29/0.12BC), X1PR
- Insulation: FM-PE; ID: 1.7 ± 0.05 mm
- Shield: AL Foil Wrap + Cotton Paper
- Braid: 16/7/0.12BC
- Jacket: Black (CTG-001) Soft PVC
- Connector 1: 3.5mm Stereo Male; Solder Type; Contacts: Brass, Nickel Plated; Housing: PP, Black; Shell: Phosphor Bronze, Nickel Plated, Molded Black PVC
- Connector 2: 3P Microphone Female; Assembly Type; Contact: Phosphor Bronze, with Black Plastic Shell, for 4.0~8.0 Wire
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2

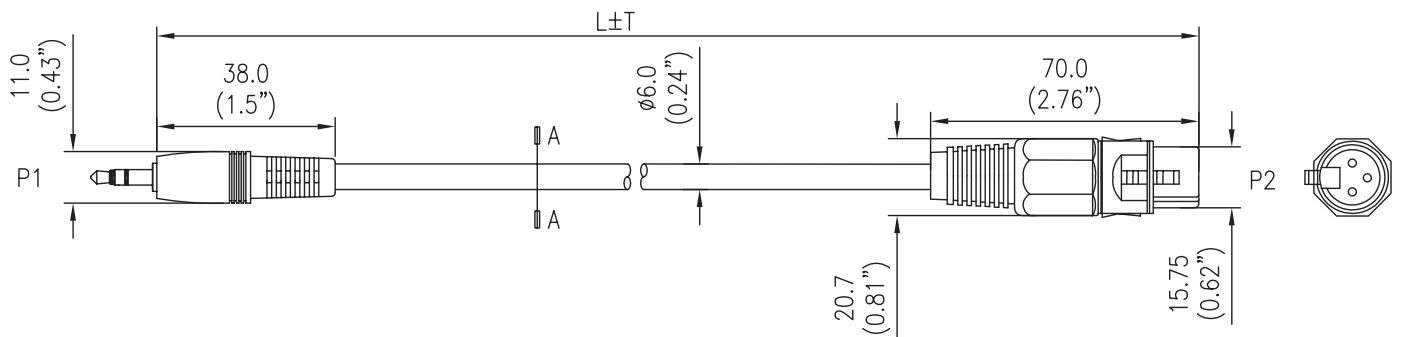

3.5mm STEREO MALE FRONT VIEW



3P MICROPHONE FEMALE FRONT VIEW

C2G®

c2g.com | legrandav.com

USA

800.CABL.911

trg@c2g.com

A brand of **legrand®**

©2021 Legrand AV Inc. 200991 US 01/21 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

COMMERCIAL AV BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold